


7-JUN-2016 16:40
S:\545600 Four Knox Co Bridges\QDN\Bridges\QO_BSC Proposed Layout.dgn



EROSION PREVENTION AND SEDIMENT CONTROL LEGEND		
SYMBOL	ITEM	STD. DWG.
▲ STR-STR-STR ▲	SILT FENCE WITH WIRE BACKING	EC-STR-30

- NOTES:**
1. COLD PLANNING MAY BE NEEDED OR LESS DEPENDENT UPON CROSS SLOPES OF THE ROADWAYS. HOWEVER, 1/4" SAW CUT AT BEARING OF TRANSITION SHALL BE MAINTAINED.
 2. IF COLD PLANNING UNCOVERS BASE STONE, MINERAL AGGREGATE TYPE A BASE, GRADING O MATERIAL SHALL BE ADDED IN A MINIMUM OF ONE 6" COMPACTED LIFT. AN APPLICATION OF PRIME BASE SHALL BE PLACED BETWEEN THE BASE AND ANY ASPHALT AT A RATE OF 0.35 GAL/SY, ALL COST TO EXCAVATE BASE STONE, INSTALL GRADING O MATERIAL, AND APPLY PRIME BASE SHALL BE INCLUDED IN THE BID. OTHER ITEMS:
 3. BRIDGE TERMINAL ASSEMBLIES ITEM NO. 705-01-01, GUARDRAIL AT BRIDGE ENDS SHALL BE CONSTRUCTED IN ACCORDANCE WITH OHIO DEPARTMENT OF TRANSPORTATION STANDARD SPECIFICATIONS FOR HIGHWAYS AND BRIDGES, 2011 EDITION, SPECIFICATIONS FOR BRIDGE ENDS AND GUARDS. THESE DRAWINGS ARE INCORPORATED IN THIS PLAN SET FOR REFERENCE.
 4. FOR OTHER GUARDRAIL INSTALLATIONS, SEE TDD STD. DWS. S-GR3-1, S-GR3-2, S-GR3-30, S-GR3-3P, S-PL-3 AND S-PL-6.

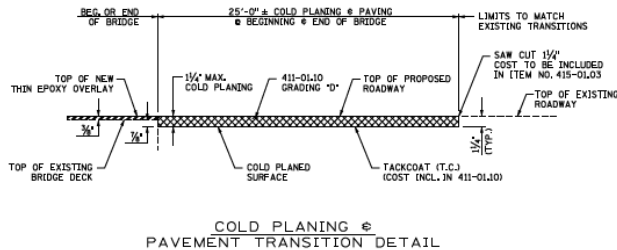

KNOX COUNTY
DEPARTMENT OF ENGINEERING & PUBLIC WORKS
CONTRACT #XXX
BELL'S CAMPGROUND ROAD OVER BULL RUN CREEK
BRIDGE REPAIRS
***** ADMINISTRATION *****
OWEN, P.E., DEPUTY DIRECTOR

ROADWAY DETAILS

[illegible]

SCALE 1" = 20'

DRAWN	D. HOWARD
DESIGNED	A. FORD

DESIGN	J. ECKEL
CHECKED	A. DAYLISO

✓ Yes

VOLKERT

--

1000

1000

1000

1000

1000

1000

APPROVED

APPROVED

JOB NO. _____

545601-17

DATE	6/17/16
------	---------

SHEET	10
-------	----

FILE NO.